




SECTIUNE A - A

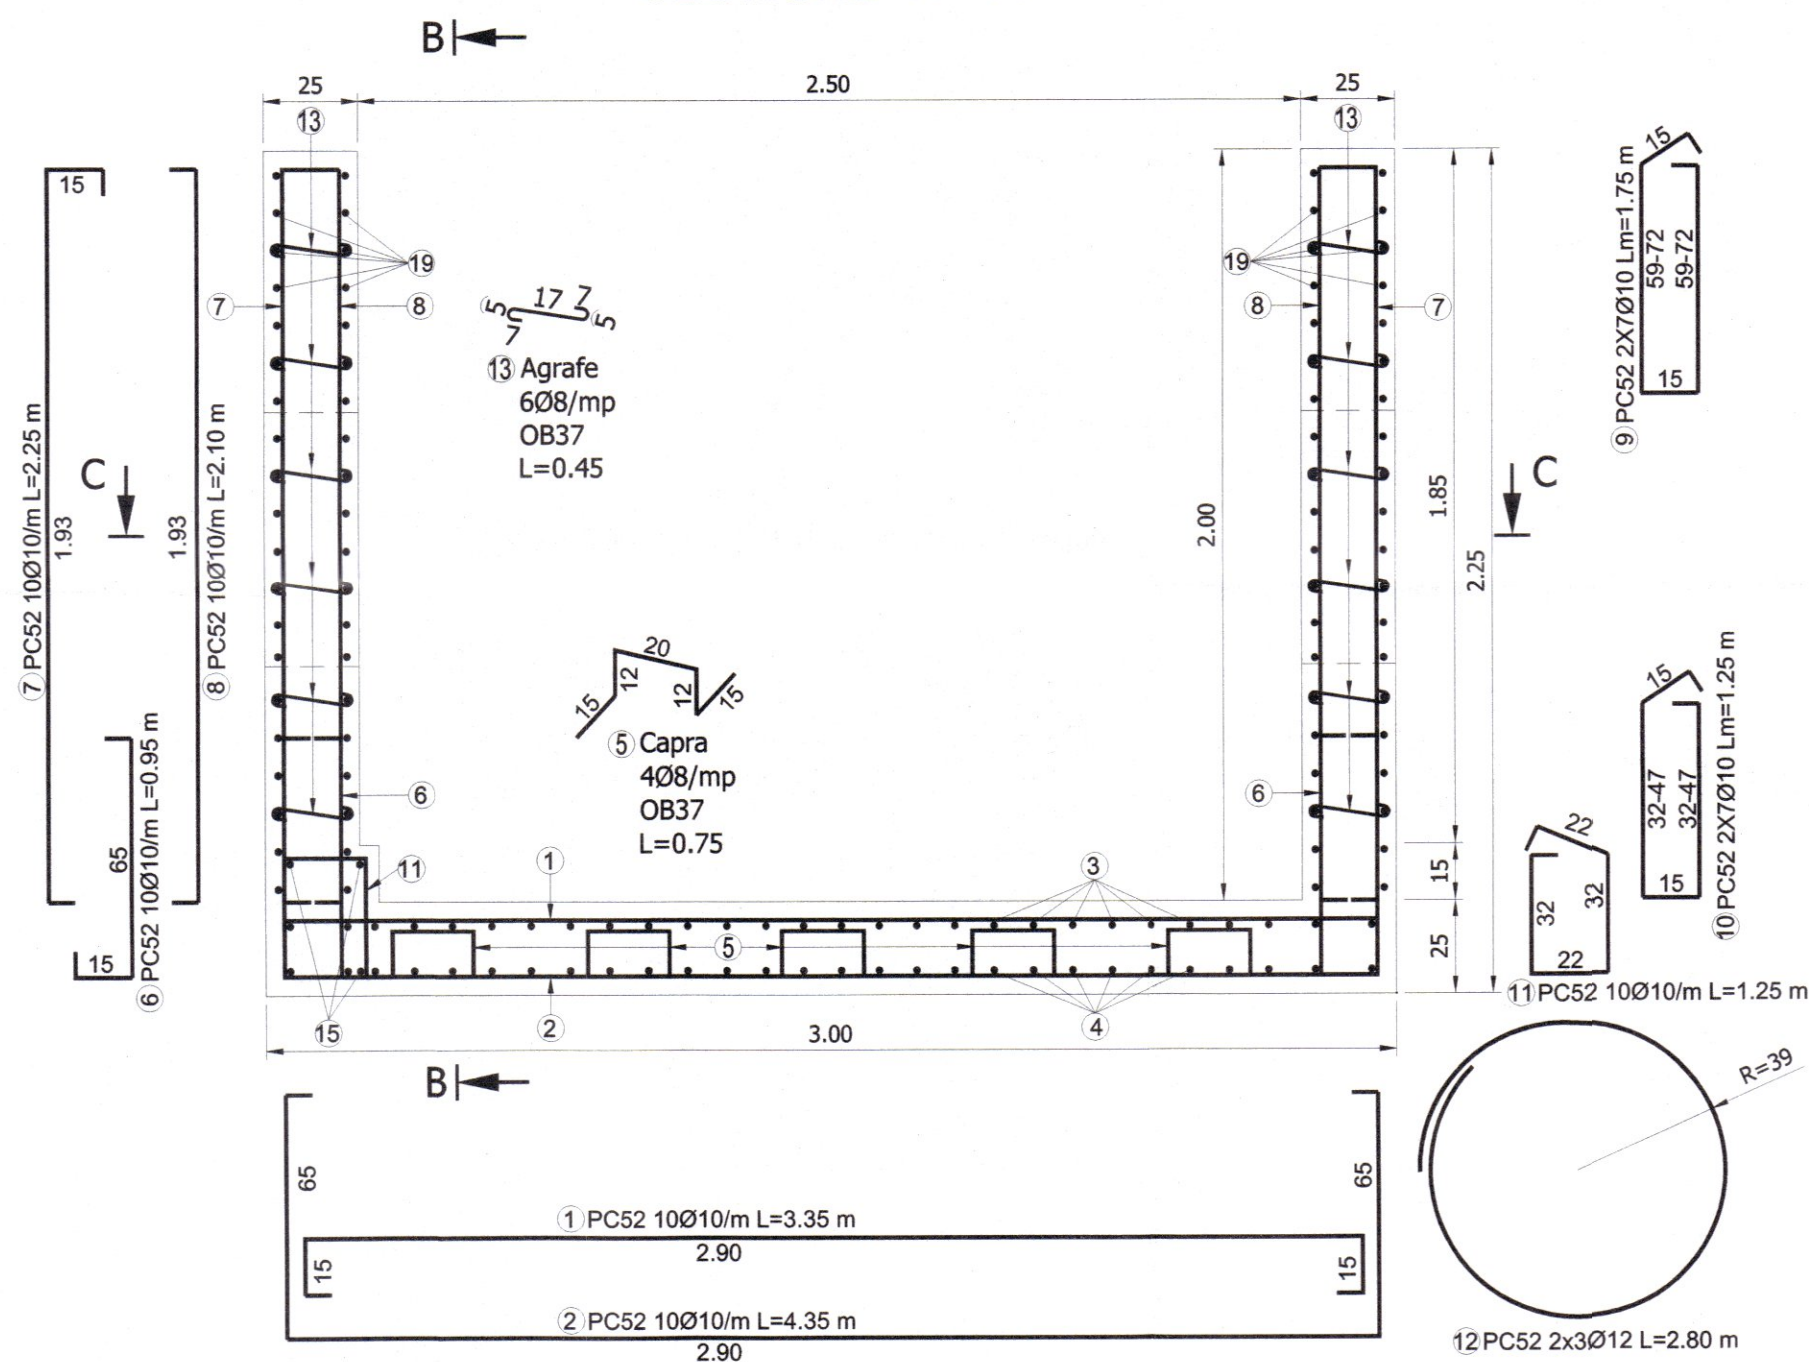


SECTIUNE B - B

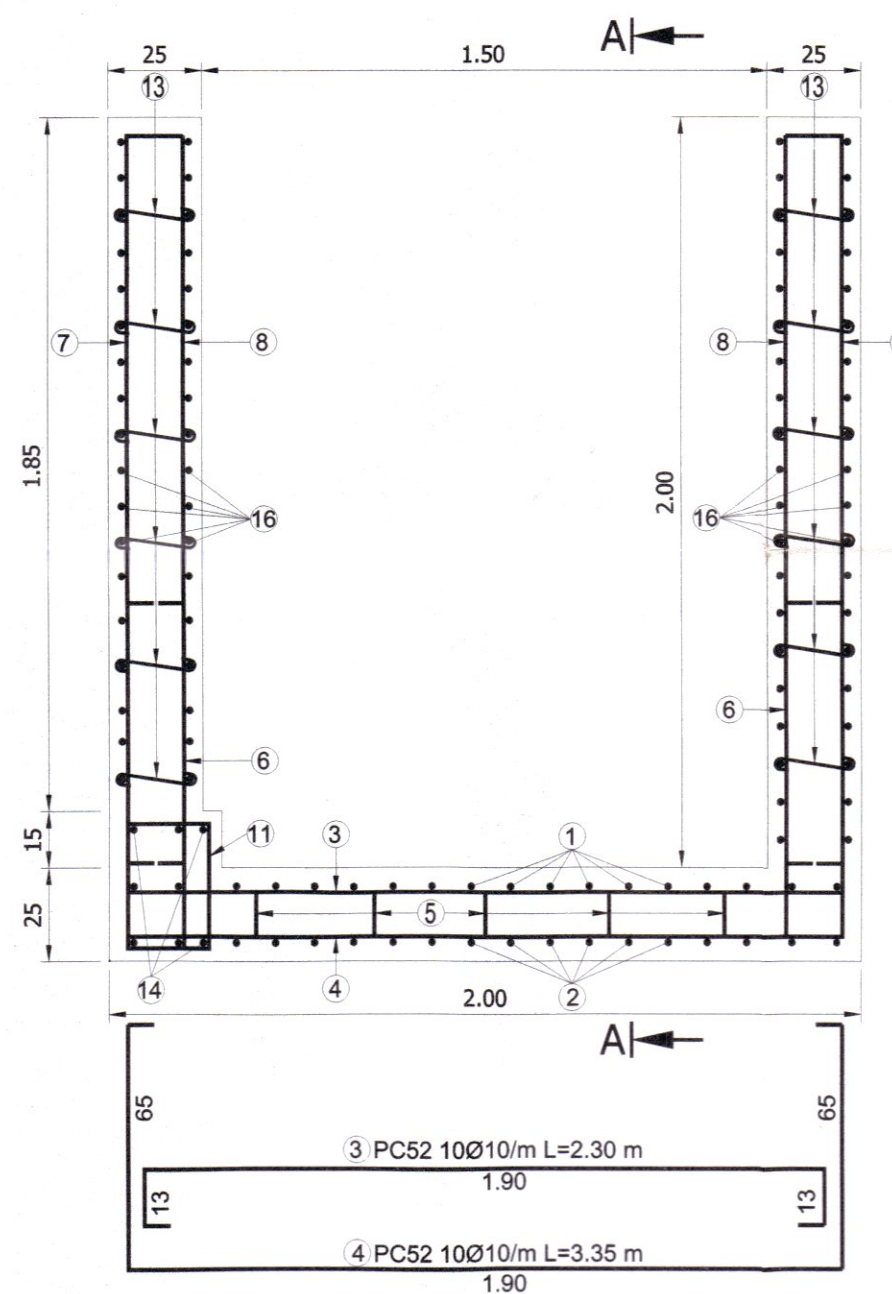

SECTIUNE C - C

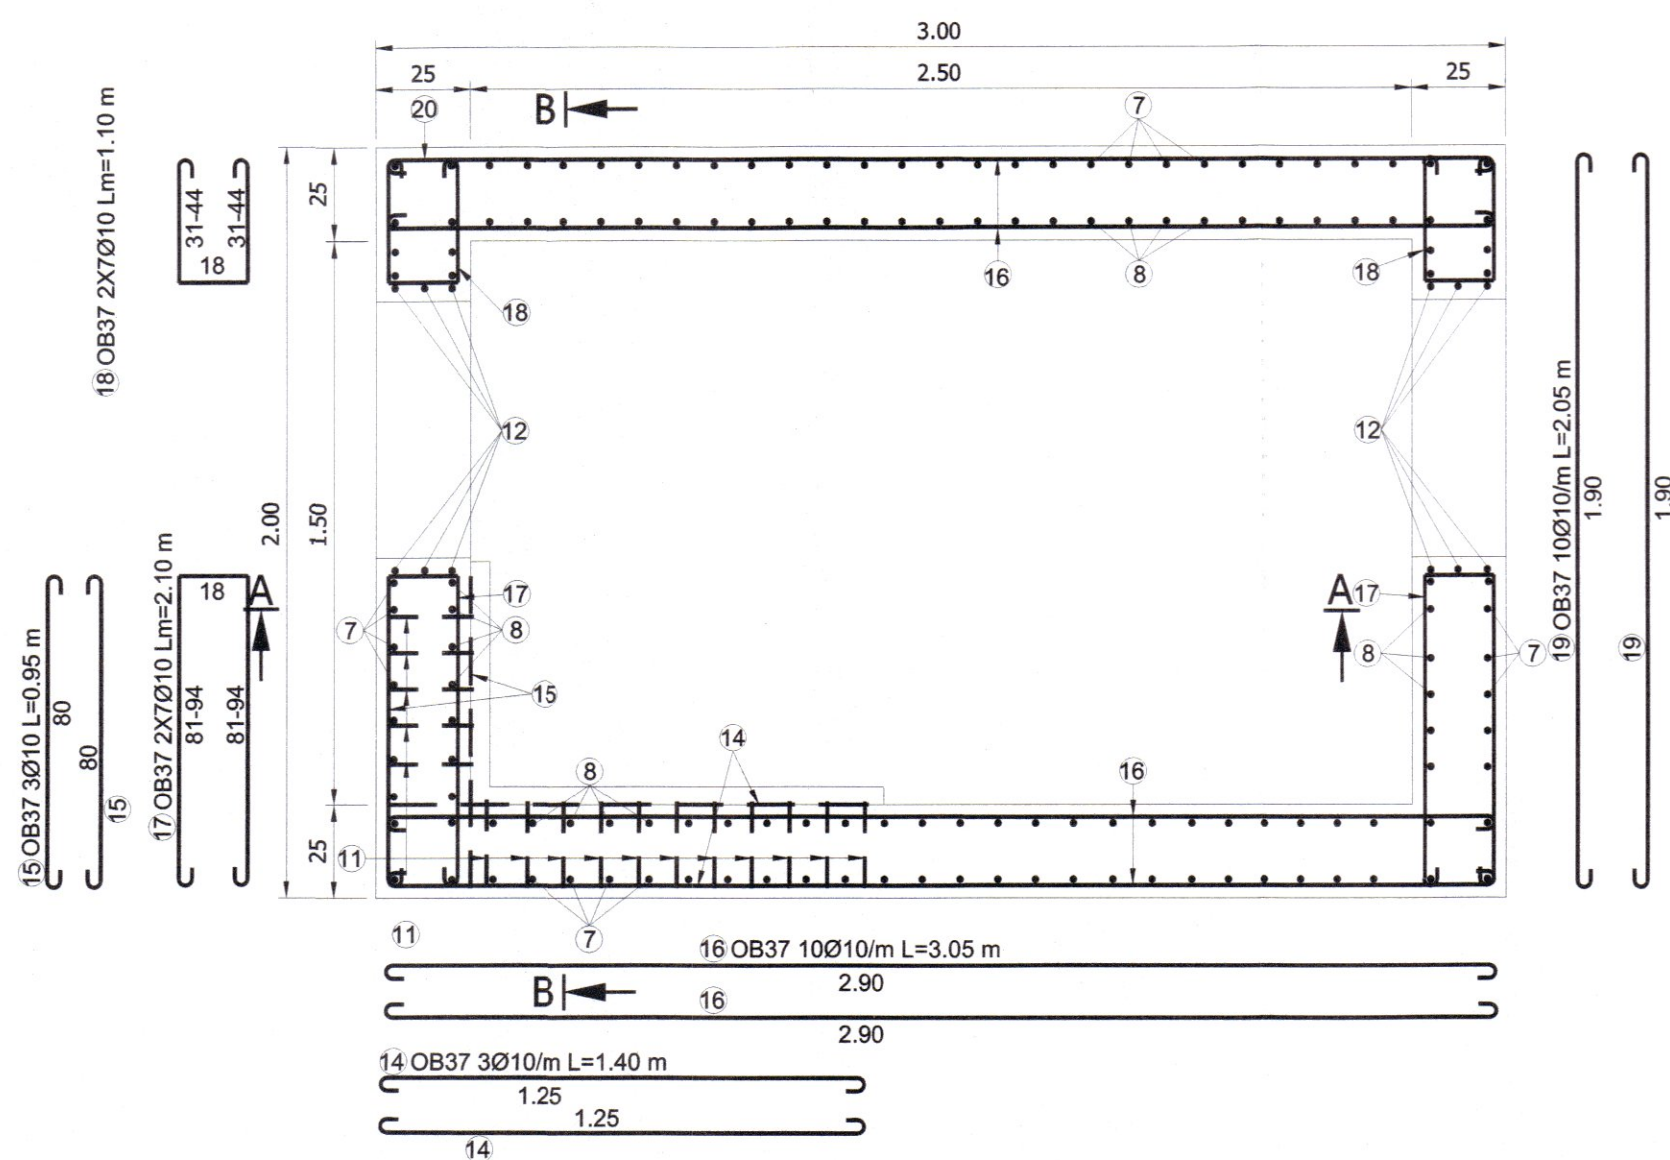

RAMA SI GRATAR PENTRU BASA

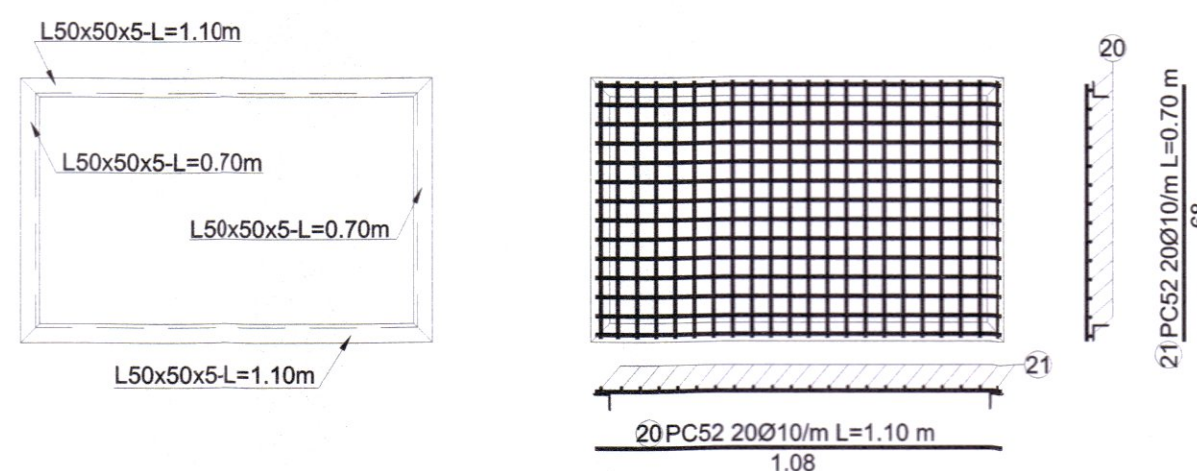

EXTRAS ARMARE

Marca	Ø	Nr. bare asemenea	Lungimea unei bare	Lungimea in metri			
				OB37		PC52	
				Ø 8	Ø 10	Ø 10	Ø 12
1	10	19	3.35	-	-	63.7	-
2	10	19	4.35	-	-	82.7	-
3	10	28	2.30	-	-	64.4	-
4	10	28	3.35	-	-	93.8	-
5	8	15	0.75	11.3	-	-	-
6	10	74	0.95	-	-	70.3	-
7	10	78	2.25	-	-	175.5	-
8	10	74	2.10	-	-	155.4	-
9	10	14	1.75	-	-	24.5	-
10	10	14	1.25	-	-	17.5	-
11	10	16	1.25	-	-	20.0	-
12	12	6	2.80	-	-	-	16.8
13	8	96	0.45	43.2	-	-	-
14	10	6	1.40	-	8.4	-	-
15	10	6	0.95	-	5.7	-	-
16	10	80	3.05	-	244.0	-	-
17	10	14	2.10	-	29.4	-	-
18	10	14	1.10	-	15.4	-	-
19	10	52	2.05	-	106.6	-	-
20	10	14	1.10	-	15.4	-	-
21	10	22	0.70	-	15.4	-	-
Lungime totala pe diametre (m)				54.45	409.5	798.5	16.8
Masa pe metru (Kg/m)				0.395	0.617	0.617	0.888
Masa pe diametre (Kg)				22	253	493	15
Masa totala pe tip de otel (Kg)				275	510		
Masa totala (Kg)					785		

Volum beton = 6.00 mc
Acoperirea cu beton a armaturii a=5 cm

CERINTE DE CALITATE
conf. CP 012/1 - 2007

Beton C16/20; C8/10 (beton de egalizare)
Otel PC 52; OB 37
Clasa de expunere : XC2
Valoarea maxima a/c : 0.60
Dozaj minim ciment (kg/m³): 260

IN CONFORMITATE CU REGULAMENTUL DE VERIFICARE TEHNICA DE CALITATE A PROIECTELOR, A EXECUTIEI LUCRARILOR DE CONSTRUCTII APROBAT CU HG NR. 925 /1995, COMPLETAT CU ORDINUL M.L.P.T.L. NR.777/N/2003, VERIFICAREA PROIECTELOR SE EFECTUEAZA PENTRU CERINTELE A11 (A1), B9 si Is. CETEGORIA DE IMPORTANTA "C" NORMALA, CALITATEA LUCRARILOR ASIGURANDU-SE DUPA MODELUL 3.

SE VOR RESPECTA IN MOD OBLIGATORIU DE CATRE "CONSTRUCTOR" NORMELE SI LEGISLATIA DE PROTECTIA MUNCII IN VIGOARE

PROIECTANT:				Beneficiar: PRIMARIA MUNICIPIULUI SLOBOZIA	
ECOTERRA S.R.L. BUCURESTI				Proiect: Actualizare PT si AT pentru Extindere si reabilitare sistem de canalizare menajera si pluviala in cartierul Zona Industrial Vest - Municipiul Slobozia	
				Pr. nr. 500/2013 Indicativ 74-PT+DE+AT-IS-2013	
				Denumire planșă:	
				Plan armare camin Tip I 2.50x1.50x1.80 m	
				ZONA INDUSTRIALA VEST	
				ZIV - RCC- 05	